

READ & SAVE THESE INSTRUCTIONS
ACCESS LIGHTING
MODEL # 50120/50121
INSTALLATION & OPERATION INSTRUCTIONS

1) TOOLS AND MATERIALS REQUIRED

- ❖ Blade Screwdriver
- ❖ Star Screwdriver
- ❖ Wire Cutters
- ❖ Wiring supplies as required by Electrical Code
- ❖ Step Ladder
- ❖ 3 x 60W, 75W/A-19/Medium Base Bulbs (model dependant)

Attention:

Before assembling your lighting fixture, please read the following instructions.

(2) GENERAL

1. To ensure the success of the installation, be sure to read these instructions thoroughly before beginning.
2. All electrical connections must be in accordance with local codes, ordinances, or the National Electrical Code. If you are unfamiliar with methods of installing electrical wiring, secure the services of a qualified licensed electrician.
3. These fixtures are intended for mounting to a standard 4" x 2 1/2" deep metal octagon outlet box. The box must be directly supported by the building structure and U.L. Recognized.
4. Before commencing with the installation, *disconnect the power by turning off the circuit breaker* or by removing the fuse at the fuse box. Turning the power off using the light switch is not sufficient to prevent electrical shock.

NOTE:

The important safeguards and instructions appearing in this manual are not meant to cover all possible conditions and situations that may occur. It must be understood that common sense, caution and care, are factors that cannot be built into any product. The person(s) caring for and operating the fixture must supply these factors.

(3) UNPACKING THE FIXTURE

On checking the contents of the box you will find:

1. Universal Crossbar
2. Hardware Packet
3. Mounting Canopy
4. Round Metal Plate
5. Flat Glass
6. Curved Glass Diffusers (3)
7. Brackets and Screws

(4) PREPARE THE FIXTURE


1. If you are replacing an existing fixture, disconnect and remove the old fixture. Expose the supply wiring from the outlet box.
2. Lay the un-assembled fixture on a soft surface and carefully remove all the packing material.
3. Attach the supplied **Universal Crossbar** to the **J- box**, with the supplied **Mounting Screws (1)**. Ensure that the two additional screws in the **Universal Crossbar** face outward, away from your mounting surface.
4. **The Fixture Assembly should be assembled but in the event that it is not:** Take the three **Curved Glass** and align them so that they slide, from opposite sides, into the middle of the **Metal Brackets (2-1)**. Now align the holes in the **Curved Glass** with the holes in the **Metal Brackets (2-1)** and using the **Glass Securing Screws (2-2)** tighten, so that the **Glass Securing Screws (2-2)** are flush to the **Metal Brackets (2-1)**. Repeat the procedure with remaining ends of the **Curved Glass Diffusers (2)**.
5. Secure the **Round Metal Plate** to the **Curved Glass Diffuser (2)** by aligning the holes in the **Metal Brackets (2-1)** with the holes in the **Round Metal Plate**. Secure with the three supplied **Thumb Screws or Knobs (3)**.
6. Attach the **Supply Wires** to the **Fixture Wires** in the following manner. The **Black supply wire** attaches to the **Black fixture wire** and the **White supply wire** attaches to the **White fixture wire**. Attach the **Green/Ground wire** from the fixture to the **Electrical Supply Wire** or to the **Green Screw** located on the **Mounting Plate**. Secure these connections with supplied **Wire Connectors (4)** and tape these connections with electrical tape (not supplied).
7. Attach the **Round Metal Plate** to the **Universal Crossbar** by positioning the **Round Metal Plate** such that the **Two Screws** hanging from the **Universal Crossbar** are placed through the designated holes in the **Round Metal Plate**. Secure with the supplied **Nuts (5)**.
8. Insert 3 x 60W or 75W/A-19/Medium Base Bulbs (model dependant). **Do not exceed wattage as stated on warning label.**
9. Fit the **Flat Glass** to the base of the **Curved Glass Diffuser (2)** placing the **Nipple** through the designated hole in the center of the **Flat Glass**. Secure the **Flat Glass** with the supplied **Finial (7)**.
10. Restore electricity and enjoy your new lighting fixture.

CAUTION:

- **Ensure that the Fitting is Cool and Switched off, Before Changing Bulbs.**
- **Do Not use Bulbs Exceeding Maximum Wattage As Per Caution Label.**
- **Do Not Touch the Bulb while fixture is in operation.**
- **Do Not Place Fixture in Close Proximity to Combustible Materials.**

a c c e s s

MODEL 50120/50121

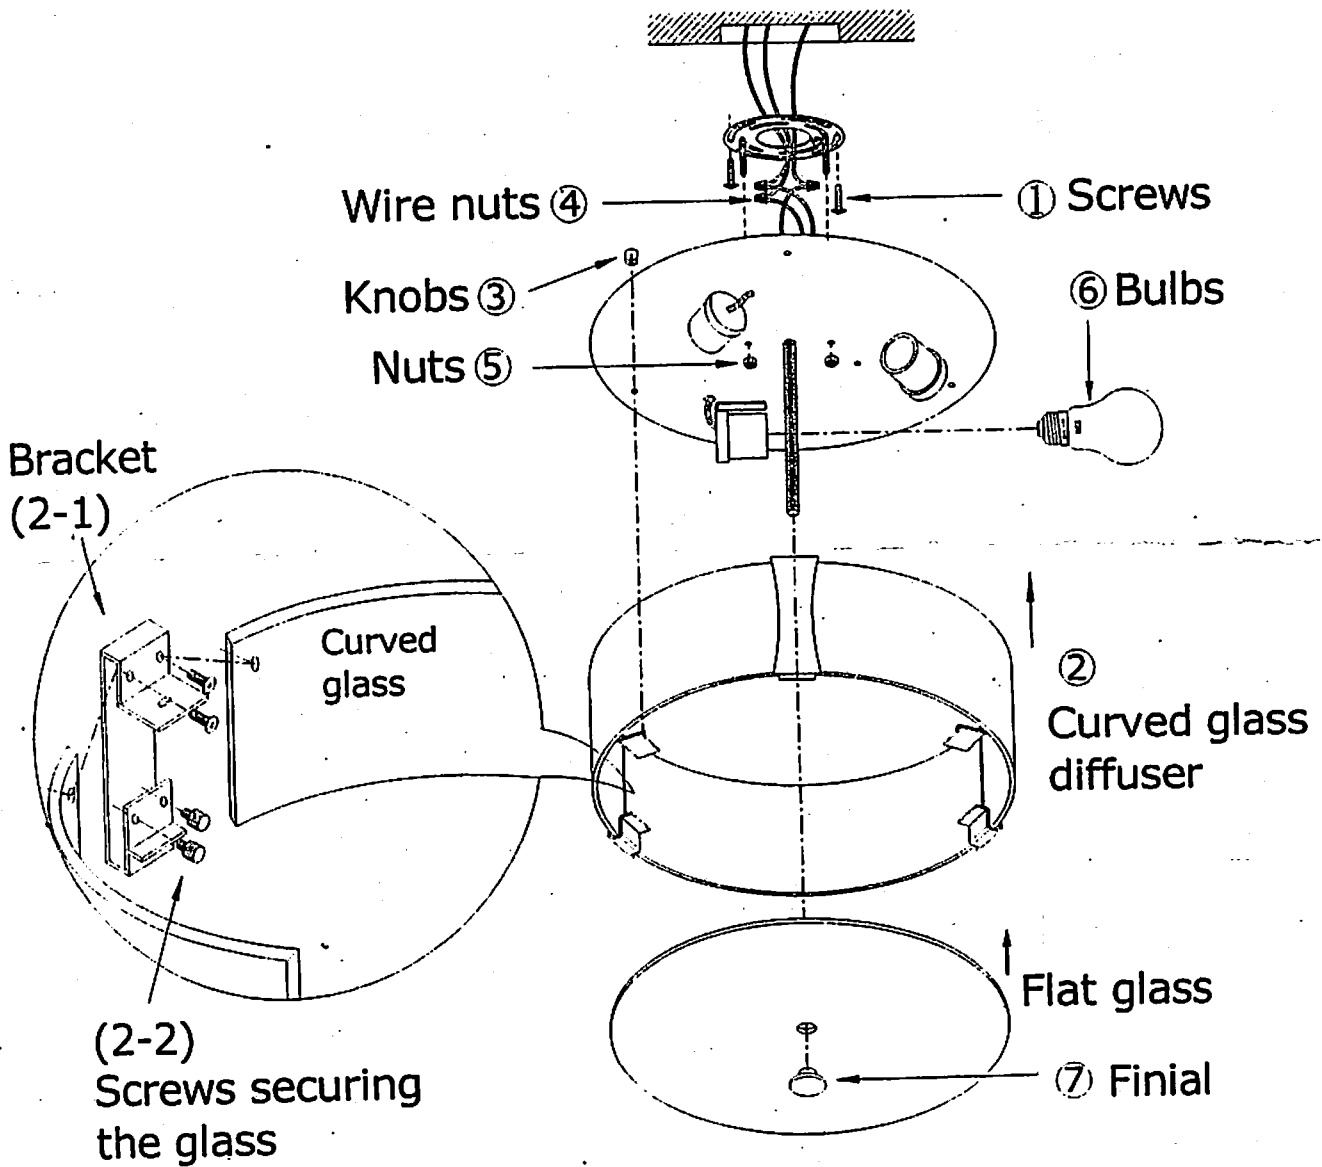

access

LIGHTING